

B4VM-X Series

Air Handler with TXV 14+ SEER Residential System 24,000 - 60,000 Btuh (Heat Pump & Air Conditioner) R-410A Refrigerant

The B4VM-X Series of air handlers, when combined with our heat pump or air conditioner, offers a full line of quality, split system heating and cooling equipment.




WARRANTY

- This product carries a 5-year all parts warranty. When installed with a matched outdoor unit, the air handler will carry the outdoor system warranty. See current warranty document or visit our consumer web site for warranty details.

FEATURES and BENEFITS

- **ECM Variable Speed Motor:** Programmed to provide 12 field-selectable cooling airflows and 4 heating airflows to match any application.
- **Quiet Blower Operation:** Extra quiet and smooth blower on and off cycles.
- **Constant airflow:** Motor automatically adjusts to different static loads.
- **Selectable delay profiles:** Increases efficiency and comfort.
- **Reduced air stratification:** This results in improved air quality by optimizing humidity removal and filtration capabilities.
- **Multi-poised:** Can be used in horizontal, upflow, downflow and vertical applications.
- **Built in Filter Rack:** makes the air handler easy to service.
- **Plug-in Heater Kit:** Available in 5 kw through 30 kw (Not for use in 115 Volt units)
- **Circuit Board:** Incorporating blower time delay relay, low voltage terminal strip, and heat-strip sequencing.
- **Breaker Accessibility:** Breaker accessible from the front of the unit when heater is applied.
- **Plastic Drain Pan:** Provides corrosion resistance.
- **Durable Cabinet:** Galvanized steel with a polyurethane finish. The finish will endure 950 hours of salt spray and resist corrosion 50% better than comparable units.
- **Designed to meet the requirements 610.2.A.2:** Meets Florida building code requirements for air leakage.
- **Thermal Expansion Valve:** Factory installed externally equalized thermal expansion valve provides precise refrigerant control under varying load conditions.
- **Cabinet Insulation:** 1" insulation with an R-value of 4.2 contributes to quiet operation and prevents cabinet sweating in difficult applications.

MODEL IDENTIFICATION CODE

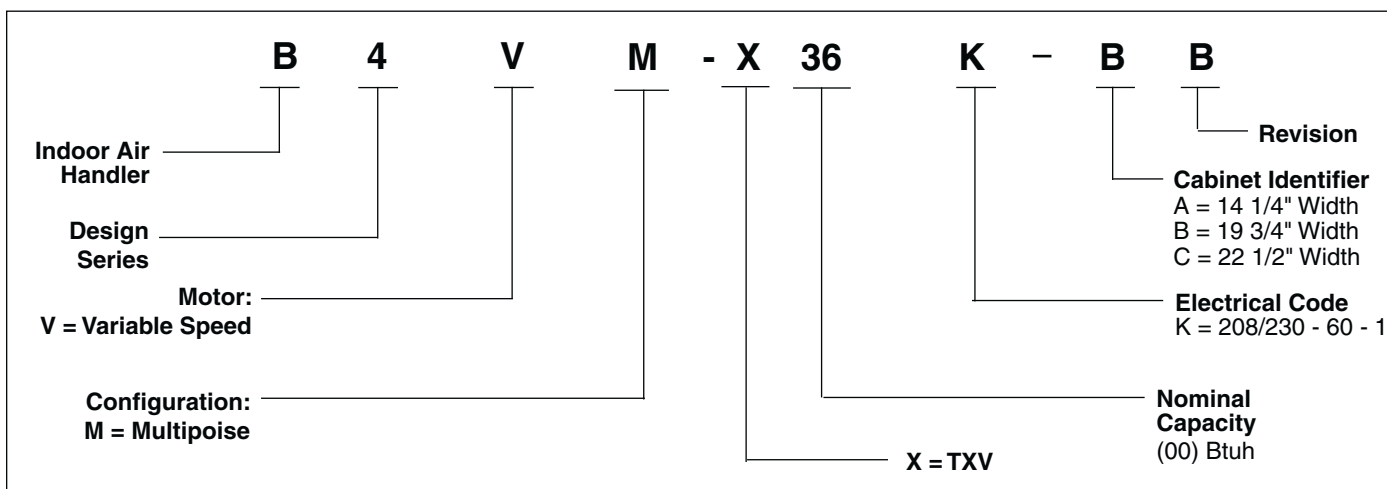

SPECIFICATIONS

Model B4VM-X	24K-A	24K-B	30K-A	30K-B	36K-B	48K-B	48K-C	60K-C
Refrigerant Flow Control	TXV	TXV	TXV	TXV	TXV	TXV	TXV	TXV
Maximum Available Auxiliary Heat (kw)	10	20	15	20	20	20	30	30
Nominal Blower Size (D X W)	10 x 6	11 x 8	10 x 6	11 x 8	11 x 8	11 x 8	11 x 10	11 x 10
Variable Speed Motor HP	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4
CFM*	540 - 1165	720 - 1450	540 - 1165	720 - 1390	720 - 1450	720 - 1450	1075 - 2150	1075 - 2150
Filter Size	12 x 20 x 1	18 x 20 x 1	12 x 20 x 1	18 x 20 x 1	18 x 20 x 1	18 x 20 x 1	20 x 20 x 1	20 x 20 x 1
Approximate Shipping Weight (lbs.)	91	120	91	111	140	140	170	170

*Field selectable in 12 steps

NOTES: See current AHRI Directory for certified combinations and ratings.
www.ahridirectory.org

ACCESSORIES

Accessory Kit Description	Cabinet Size			Part Number
	A	B	C	
Downflow Adaptor Kit	X			917342
		X		919321
			X	919322
Single Circuit Adaptor for 2 Circuit Breakers	X	X	X	913874
Single Circuit Adaptor for 3 Circuit Breakers	n/a	n/a	X	913556

240v Single-Phase Electric Heater Kits


Nominal KW	Matched Units								Part Number	
	24K-A	24K-B	30K-A	30K-B	36K-B	48K-B	48K-C	60K-C	With Circuit Breakers	Without Circuit Breakers
5	X	X	X	X	X	X	X	X	904407	904406
8	X	X	X	X	X	X	X	X	904409	904408
10	X	X	X	X	X	X	X	X	904412	904411
15	n/a	X	X	X	X	X	X	X	904414	n/a
20	n/a	X	n/a	X	X	X	X	X	904416	n/a
25	n/a	n/a	n/a	n/a	n/a	n/a	X	X	904417	n/a
30	n/a	n/a	n/a	n/a	n/a	n/a	X	X	904418	n/a

240v Three-Phase Electric Heater Kits

Nominal KW	Matched Units								Part Number	
	24K-A	24K-B	30K-A	30K-B	36K-B	48K-B	48K-C	60K-C	With Circuit Breakers	Without Circuit Breakers
9	X	X	X	X	X	X	X	X	904410	n/a
15	n/a	X	X	X	X	X	X	X	904415	n/a

DIMENSIONS

Models B4VM-X	Height	Width	Refrigerant Connections		Filter Size	Supply Air Duct Dimensions
			Suction Dia.	Liquid Dia.		
24K-A	43 1/2	14 1/4	3/4	3/8	12 x 20 x 1	12 7/8 x 12 3/4
24K-B	49 1/2	19 3/4	7/8	3/8	18 x 20 x 1	12 7/8 x 18 1/4
30K-A	43 1/2	14 1/4	3/4	3/8	12 x 20 x 1	12 7/8 x 12 3/4
30K-B	43 1/2	19 3/4	3/4	3/8	18 x 20 x 1	12 7/8 x 18 1/4
36K-B	49 1/2	19 3/4	7/8	3/8	18 x 20 x 1	12 7/8 x 18 1/4
48K-B	49 1/2	19 3/4	7/8	3/8	18 x 20 x 1	12 7/8 x 18 1/4
48K-C	56	22 1/2	7/8	3/8	20 x 20 x 1	12 7/8 x 21
60K-C	56	22 1/2	7/8	3/8	20 x 20 x 1	12 7/8 x 21

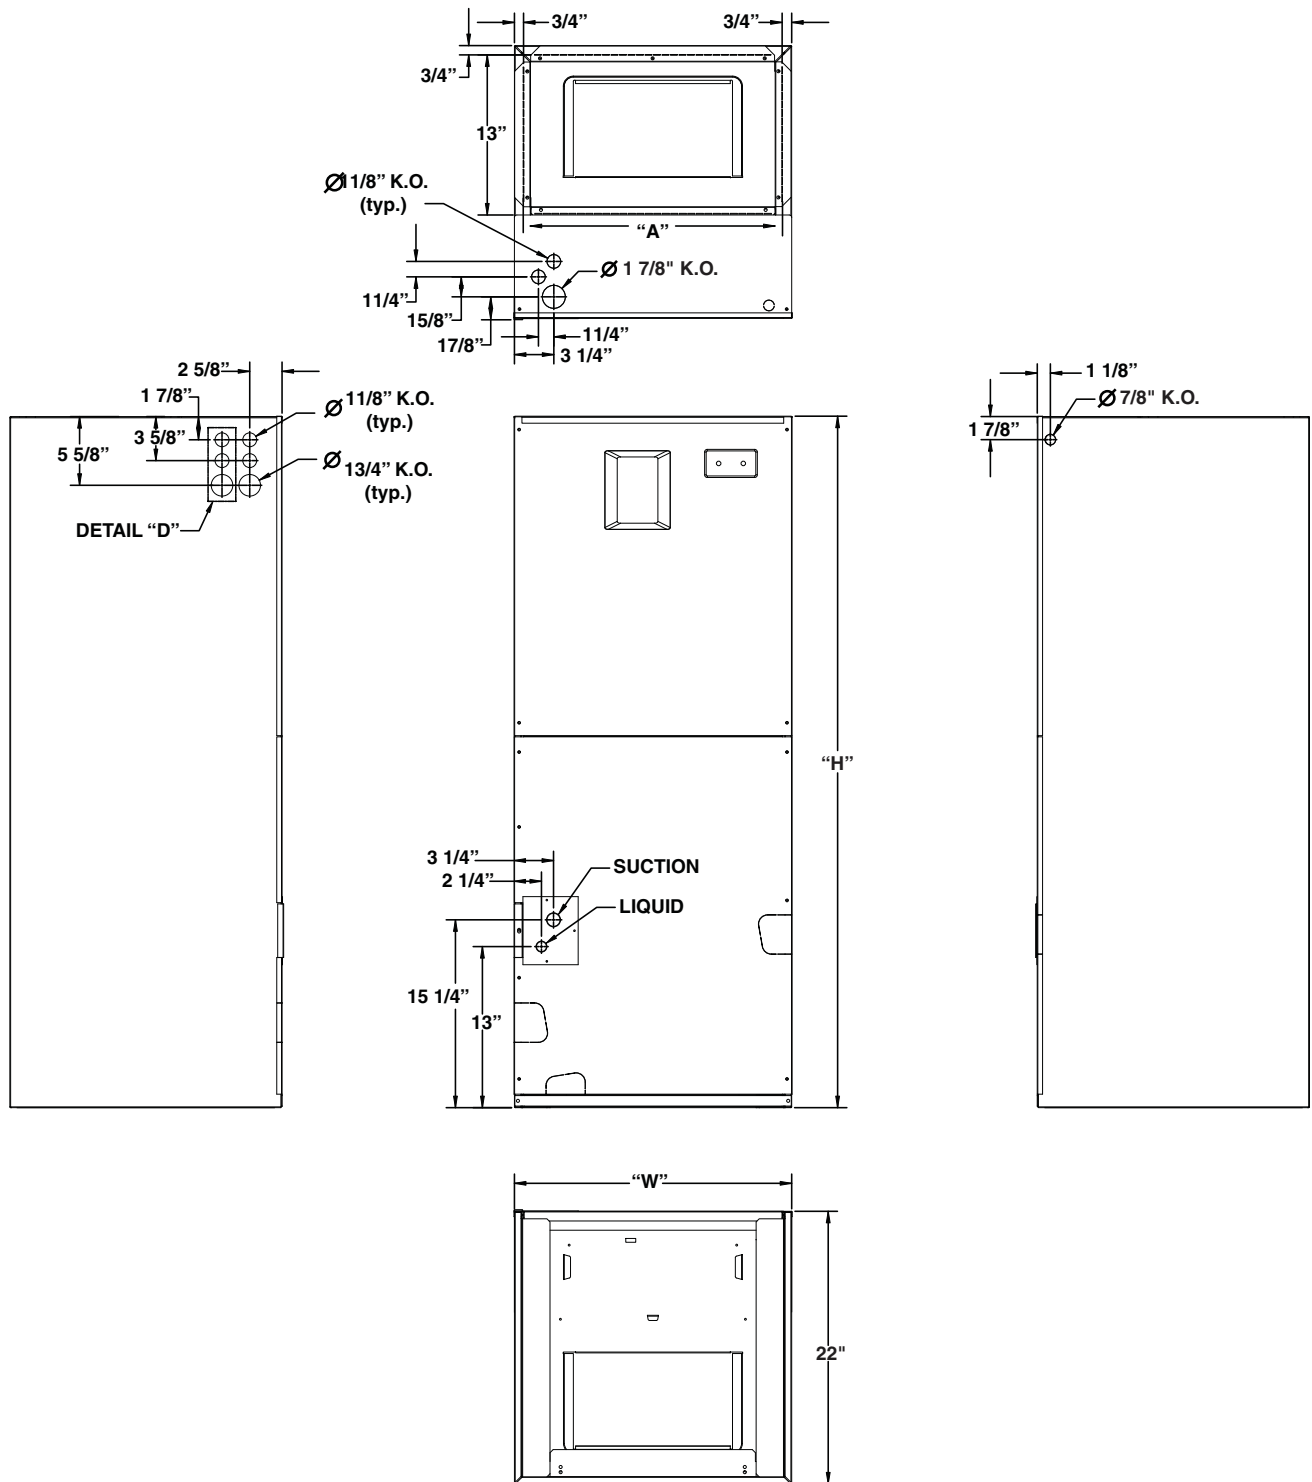

ELECTRICAL DATA

Model Number H6HK- Voltage KW			Variable Speed Air Handler							
			Min. Circuit Ampacity				Max. Over-Current Protection			
			Circuit A	Circuit B	Circuit C	Single Circuit	Circuit A	Circuit B	Circuit C	Single Circuit
005H-XX	240	4.8	-	-	-	33.5	-	-	-	40
008H-XX	240	7.5	-	-	-	48.1	-	-	-	50
010H-XX	240	9.6	-	-	-	58.5	-	-	-	60
015H-XX	240	14.4	58.5	25.0	-	83.5	60	30	-	90
020H-XX	240	19.2	58.5	50.0	-	108.5	60	50	-	125
025H-XX	240	24.0	58.5	50.0	25.0	133.5	60	30	30	150
030H-XX	240	28.8	58.5	50.0	50.0	158.5	60	50	60	175
005H-XX	208	3.6	-	-	-	30.9	-	-	-	40
008H-XX	208	5.6	-	-	-	43.1	-	-	-	50
010H-XX	208	7.2	-	-	-	52.5	-	-	-	60
015H-XX	208	10.8	52.5	21.6	-	74.2	60	30	-	80
020H-XX	208	14.4	52.5	43.3	-	95.8	60	50	-	100
025H-XX	208	18.0	52.5	43.3	21.6	74.2	60	30	25	125
030H-XX	208	21.6	52.5	43.3	43.3	95.8	60	50	50	150
009Q-XX	240	9.0	-	-	-	35.6	-	-	-	40
015Q-XX	240	14.4	-	-	-	51.9	-	-	-	60
009Q-XX	208	6.8	-	-	-	32.1	-	-	-	40
015Q-XX	208	10.8	-	-	-	46.0	-	-	-	50

A-CABINET

CFM	Switch Number				Nominal Capacity					
	1	2	3	4	1.5	2.0	2.5	3.0	3.5	5.0
540	0	0	0	1						
600	0	0	0	0						
660	0	0	1	0						
715	1	0	0	1						
790	1	0	0	0						
870	1	0	1	0						
915	0	1	0	1						
955	1	1	0	1						
1015	0	1	0	0						
1060	0	1	1	0						
1075	1	1	0	0						
1165	1	1	1	0						

B-CABINET

CFM	Switch Number				Nominal Capacity					
	1	2	3	4	1.5	2.0	2.5	3.0	3.5	4.0
720	0	0	0	1						
800	0	0	0	0						
850	1	0	0	1						
880	0	0	1	0						
945	1	0	0	0						
1040	1	0	1	0						
1085	0	1	0	1						
1140	1	1	0	1						
1205	0	1	0	0						
1265	1	1	0	0						
1325	0	1	1	0						
1390	1	1	1	0						

C-CABINET

CFM	Switch Number				Nominal Capacity				
	1	2	3	4	3.0	3.5	4.0	5.0	
1075	0	0	0	1					
1135	1	0	0	1					
1225	0	0	0	0					
1295	1	0	0	0					
1380	0	0	1	0					
1460	1	0	1	0					
1525	0	1	0	1					
1625	1	1	0	1					
1740	0	1	0	0					
1860	1	1	0	0					
1960	0	1	1	0					
2090	1	1	1	0					

Note: 1 = ON, 0 = OFF



GENERAL TERMS OF LIMITED WARRANTY

NORDYNE will furnish a replacement for any part of this product which fails in normal use and service within the first five years of installation, in accordance with the terms of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the NORDYNE warranty department for a copy.



COMPLETE COMFORT. GENUINE VALUE. 8000 Phoenix Parkway | O'Fallon, MO 63368-3827

Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (02/2010)

207D-0210 (Replaces 207D-0309)

www.frigidaire.net

Trademark Frigidaire is a registered trademark used under license from Frigidaire International Company, U.S.A. © NORDYNE. All Rights Reserved.